

# Aufkantungen aus Faserbeton

## Permanent edge formwork

### Verzugsfreie Lagerung und Entnahme von Aufkantungen




Aufgrund unvermeidbarer Produktionsrestfeuchte in Aufkantungen aus Faserbeton kann es bei einseitiger Austrocknung zu einem Verzug bei diesen streifenförmigen Bauelementen kommen. Bei sorgsamer, abgedeckter Lagerung kann ein Verzug nach unseren Erfahrungen gänzlich vermieden werden. Wichtig hierbei ist, dass die Folienverpackung der Palette niemals ganz geöffnet wird, so dass sie weiterhin als Schutz für die nicht benötigte Ware dienen kann. Ferner ist generell zu empfehlen, die Paletten an einem möglichst zugfreien, vor direkter Sonneneinstrahlung geschützten Ort zu lagern.

### Recommended handling during storage unpacking

*Permanent edge formwork elements are at risk of distortion due to the drying out of the residual moisture within the product. This risk can be avoided if the elements are correctly wrapped and stored in accordance with these guidelines. It is recommended that the shrink-wrap film around the pallet should never be completely removed to ensure maximum protection of the elements that are not needed immediately. Furthermore, it is also recommended that the elements should be stored in a draught free location and should be protected against direct sunlight.*

### Aufkantungen Länge 2,00 und 2,70 m

#### Permanent edge formwork length 2.00 and 2,70 m

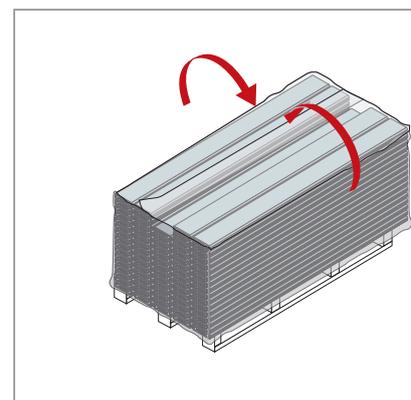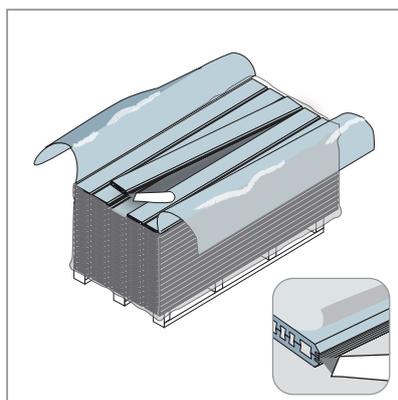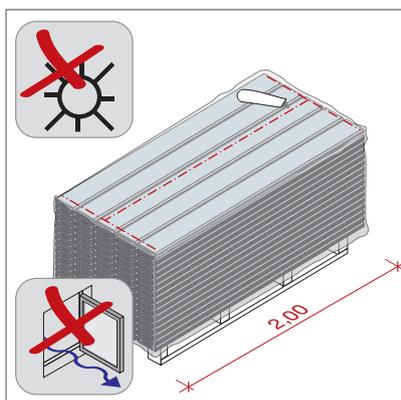

365TDB06/06 - INT/DE/GB - 02/23