


Ref:	Max Frank Pecavoid® Standard Details		
Drawing Title:	Pecavoid® RDB, RDS or RD+	REV	
		0	
DRG No:	MFL-PECAV-007	Date:	SEPT 2017
		Scale:	1:10

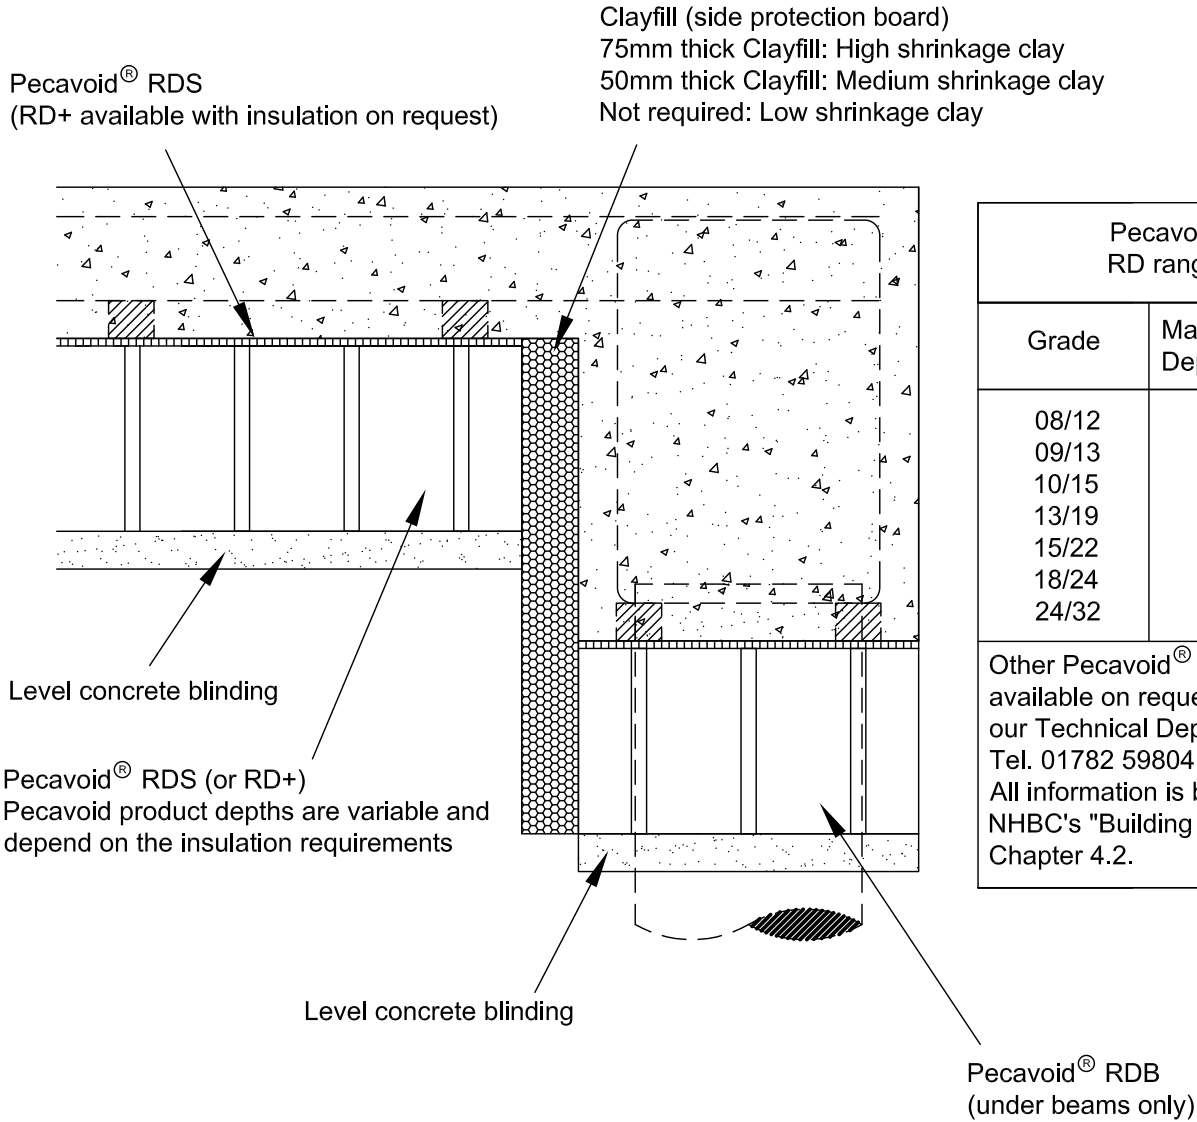

Pecavoid® RD range	
Grade	Max Concrete Depth (mm)
08/12	260
09/13	300
10/15	340
13/19	460
15/22	540
18/24	660
24/32	900

Other Pecavoid® grades are available on request. Contact our Technical Department on: Tel. 01782 598041
All information is based on NHBC's "Building Near Trees" Chapter 4.2.

Clay Heave Potential	Product Depth		
	RDS	RD+	RDB
High shrinkage clay	225mm	265mm	220mm
Medium shrinkage clay	160mm	200mm	155mm
Low shrinkage clay	90mm	130mm	85mm
	No Insulation	With Insulation	No Insulation

**PECAVOID® RDB, RDS or RD+
FOR USE UNDER A SLAB AND EXTERNAL BEAM**