


Ref:	Max Frank Pecavoid® Standard Details		
Drawing Title:	Pecavoid® RDB - High Shrinkage	REV	
		0	
DRG No:	MFL-PECAV-001	Date:	SEPT 2017
		Scale:	1:10

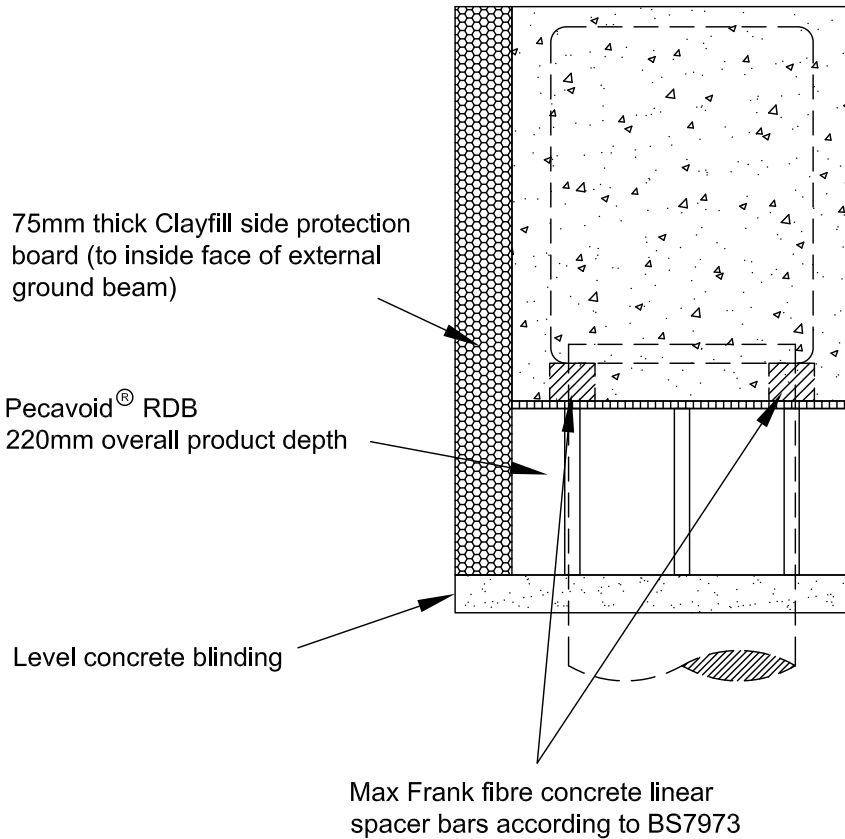

Pecavoid® RDB (for beams)	
Grade	Max Beam Depth (mm)
09/13	300
10/15	340
13/19	460
15/22	540
18/24	660
24/32	900

Other Pecavoid® grades are available on request. Contact our Technical Department on: Tel. 01782 598041  
All information is based on NHBC's "Building Near Trees" Chapter 4.2.

## Specification

Pecavoid® Ground Heave Void Former: Product Depth 220mm to create a clear void equivalent of 150mm. Grade of product to suit beam depth (refer to table above)

# PECAVOID® RDB FOR A GROUND BEAM IN HIGH SHRINKAGE CLAY