


Ref:	Max Frank Pecavoid® Standard Details		
Drawing Title:	Pecavoid® RD+ RDB	REV	
		0	
DRG No:	MFL-PECAV-008	Date:	SEPT 2017
		Scale:	1:10

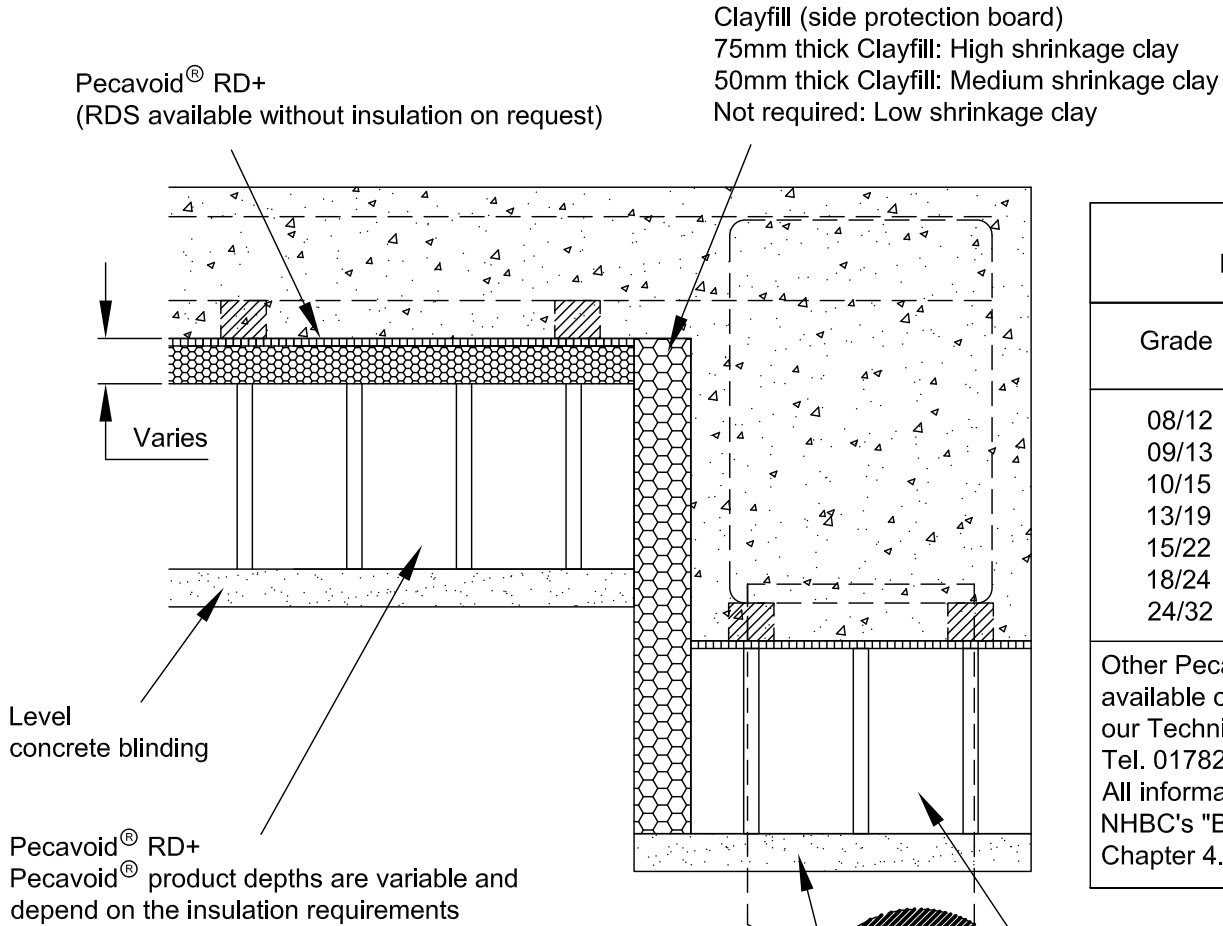

Pecavoid® RD range	
Grade	Max concrete Depth (mm)
08/12	260
09/13	300
10/15	340
13/19	460
15/22	540
18/24	660
24/32	900

Other Pecavoid® grades are available on request. Contact our Technical Department on: Tel. 01782 598041
All information is based on NHBC's "Building Near Trees" Chapter 4.2.

Clay Heave Requirement	Pecavoid® Leg Depth	Insulation Thickness Depth
High shrinkage clay	215mm	Min 50mm
Medium shrinkage clay	150mm	
Low shrinkage clay	80mm	

Pecavoid® RDB (under beams only)
220mm - High shrinkage clay
155mm - Medium shrinkage clay
85mm - Low shrinkage clay

Level concrete blinding

PECAVOID® RD+ & RDB FOR USE UNDER A SLAB AND EXTERNAL BEAM